

HOW YOUR DOORS IS CREATED


- INSULATION: 1-3/8" thick polystyrene plates.
- WINDOWS: Standard double-strength glass with a thickness of 1/8" or any special glass desired by the customer.
- ARCH: Standard or customized according to the template provided by the customer.
- DOOR DESIGN: Manufactured to customer specifications or any standard model from our catalog.

HARDWARE:

- HINGES: 11-gauge galvanized steel.
- RAILS: 0.83-gauge galvanized steel with continuous angle and channel for 2" bearings.
- BEARINGS: Sealed and maintenance-free, made of galvanized steel.
- REINFORCEMENTS: Made of 3" galvanized steel.
- BEARINGS: Galvanized steel stem, 2" nylon bearings and 11 balls.
- BALANCE: Oil-tempered torsion springs.

CONSTRUCTION SCHEME:

1. 1/4" marine plywood.
2. 1-3/8" solid structure.
3. 1-3/8" insulation.
4. 1/4" marine plywood.
5. Face.
6. Frame.

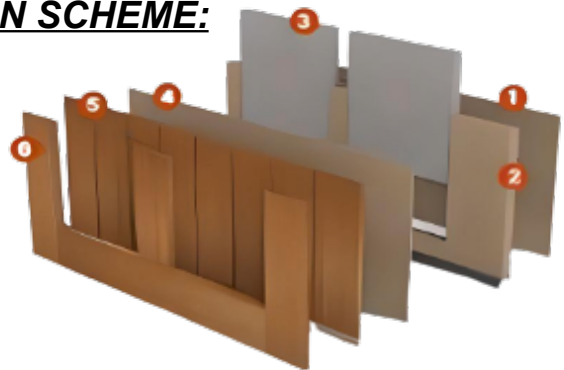

LOPEZ
PREMIUM DOORS, LLC